

HEAT RECOVERY SINGLE-ROOM UNITS

Features

- Arrangement of efficient energy-saving supply and exhaust single-room ventilation in flats, houses, cottages, social and commercial premises.
- Air purification with optional F8 filter PM2.5 99 %.
- Protection from outdoor noise.
- Reducing heat losses caused by ventilation due to heat recovery.
- Humidity balance and regulated air exchange create individually controlled microclimate.



Air flow: up to 50 m³/h 14 l/s



Heat recovery efficiency: up to 92 %



Power: from 2.07 W



Noise level: from 13 dBA










Design

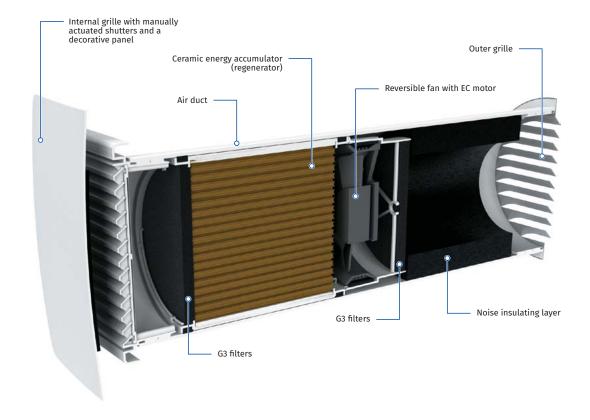

Designation key

Model	Number of units, items	Air duct	Nominal air flow [m³/h]	Hood type	Control
VENTO Eco	2	A: round air duct	50	S1: round metal grille S9: round plastic grille S: metal hood for thin walls	Pro: sensor control panel


64 blaubergventilatoren.de



HEAT RECOVERY SINGLE-ROOM UNITS

Heat and moisture regeneration


UNIT OPERATING LOGIC IN WINTER PERIOD

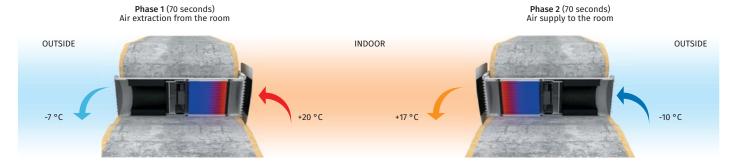

- Warm stale air is extracted from the premise, flows through the ceramic regenerator and transfers its heat energy and moisture to it.
- As the ceramic regenerator gets warmed up, the unit switches to the supply mode.
- Clean cold intake air flows through the regenerator and absorbs accumulated heat and humidity.
- When the ceramic regenerator is cooled down, the unit switches to the extract air mode.

Control

 Control of the unit operation mode is performed by means of sensor control panel located on the unit casing or a remote controller.

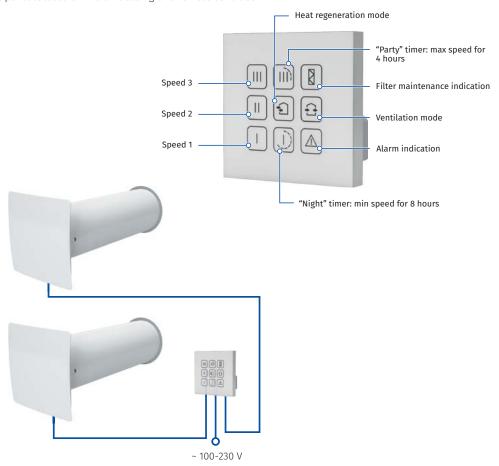


• Low voltage (12 V) power supply between control panel and VENTO Eco2 units.




HEAT RECOVERY SINGLE-ROOM UNITS

Mounting

- **o** The unit is designed for through-the-wall installation inside a prepared hole in an outer wall of the building.
- VENTO Eco2 A50 S1 allows arranging the most efficient balanced ventilation. Two units, connected to single control panel, operate in reverse phases. One unit ensures supply of fresh air to the room and the
- other unit provides air extract from the premise. In regeneration mode units change direction of air flow to opposite one every 70 seconds.
- One unit is able to ventilate a room up to 25 m². For bigger rooms two or more units must be installed.

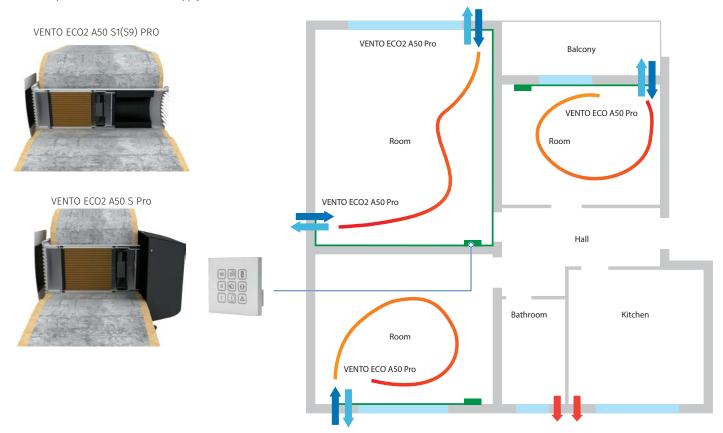

Overall dimensions [mm]

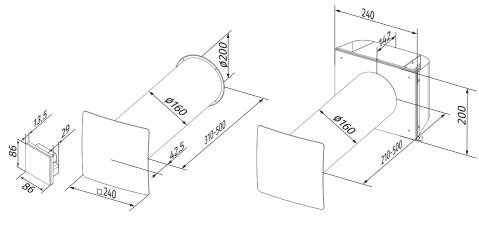

VENTO ECO2 A50 S1(S9) Pro

VENTO ECO2 A50 S Pro


66 blaubergventilatoren.de



HEAT RECOVERY SINGLE-ROOM UNITS

Technical data

Speed Voltage [V / 50 (60) Hz]	I	II	III
Voltage [V / 50 (60) Hz]			
		100-230	
Power [W]	2.07	4.15	10.10
Current [A]	0.030	0.049	0.098
RPM [min-1]	1030	1760	2690
Air flow in ventilation mode [m³/h]	15 (4)	30 (8)	50 (14)
Air flow in heat recovery mode [m³/h]	15 (4)	30 (8)	50 (14)
Filter	G3 (option: F8 PM2,5 > 99 %*)		
Transported air temperature [°C]		-20+50	
Sound pressure level at 1 m [dBA] In accordance with ISO 3741: 2004	22	29	32
Sound pressure level at 3 m [dBA] In accordance with ISO 3741: 2004	13	20	23
Outdoor sound pressure attenuation [dBA] according to DIN EN 20140		41	
Regeneration efficiency [%] In accordance with DIBt LÜ-A 20	up to 92		
SEC Class	A		
Ingress protection rating	IP24		

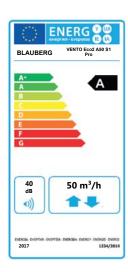

Accessories

Name		Description	
Completion Kit VENTO Eco A50		Cartridge with heat regenerator, fan and G3 filters. Square and round indoor grille with manually actuated shutters	
SE VENTO Eco A50 Pro		Sensor control panel (white)	
SE VENTO Eco A50 Pro black	(S. 19)	Sensor control panel (black)	
R 160-500	00	500 mm air duct and plastic foam plug	
R 160-700		700 mm air duct and plastic foam plug	
AH chrome 160		Outer hood made of brushed stainless steel	
AH-S chrome 160		Outer hood for thin wall made of brushed stainless steel	
Decor 150Fs An white		Outer grille	
KIT BlauPlast white 160		Kit for angular mounting with white outer grille	
KIT BlauPlast chrome 160		Kit for angular mounting with stainless stees outer grille	
FP VENTO Eco A50 G3		G3 filters (2 pcs.)	
FP VENTO Eco A50 F8	8	G2 + F8 filters (1 pc.). Filtration rate PM2.5 99 %. Combination of G2 + F8 filters reduces air flow down to 40 m³/h	
L VENTO Eco A50		Fan	
PP 160		Plastic outer grille with pipe for mounting from indoor	

^{*} maximum air flow 40 m³/h